



SN HIGH-DENSITY DUAL FIBRE CONNECTIVITY

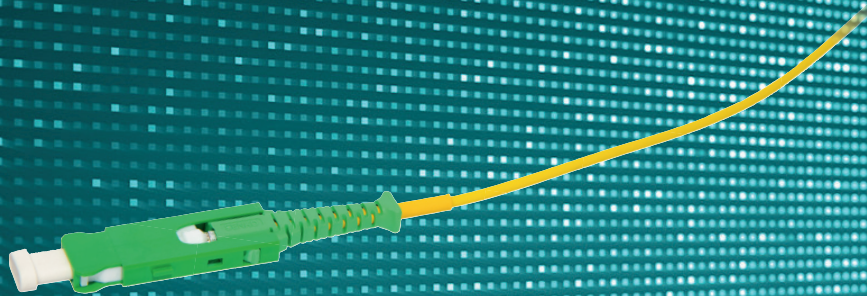

Highest Density

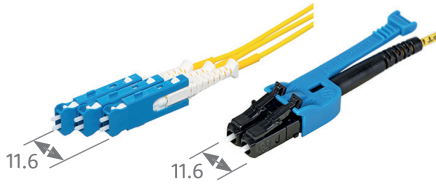


The SN uniboot connector was designed for use in small-space environments that require high-density. It has three times more link possibilities in the same area to save space and cut costs.

Maximise Space




With up to three times higher packing density, the number of connection possibilities is increased while enabling easy patch cord over length organisation with new 1.6mm duplex cable.

Push-Pull System

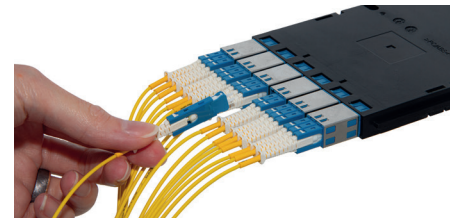

The push-pull mechanism makes it easy to handle on site. The connector is ideal for Data Centres and environments where density is a concern.

High Performance



The safe and easy-to-clean ferrule technology provides smaller loss of attenuation per connection and better return loss compared to MTP/MPO.

Highest Protection



HUBER+SUHNER also offers this connector type for Data Centre cabling with CPR B2ca cables, according to the regulation 305/2011/EN. B2ca is the premium class of connector type for environments that require very high fire safety.

Easy To Clean



The IL has a high resistance to dirt, can be easily cleaned with standard equipment, and does not require special training.