

# 42U HIGH DENSITY PATCHING FRAME


## CABLE MANAGEMENT

## PRODUCT OVERVIEW



### Features & Benefits

- Fully welded steel construction.
- Bolt down locations in base.
- Adjustable 19" mounting profiles:
  - Distance from front face minimum 77mm and maximum 245mm.
- Large base and roof apertures for cable entry.
- Infill panels front & rear with cable access apertures.
- Wardrobe mesh doors 83% open area c/w swing handle & 3 point locking.
- Removable side panels c/w cam lock & key.
- Large full height cable tray at the rear.
- Earth bonding points on all panels & frame.
- Light Grey powder coated finish (RAL7035).

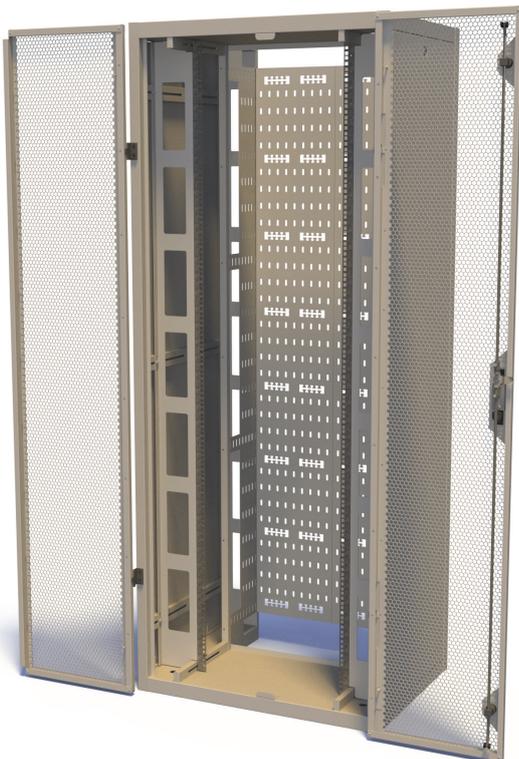

### Specifications

#### Physical

- Width - 800mm
- Depth - 700mm
- Height - 2,033mm