


CO-LOCATION SERVER RACK

800W 2 DOOR COLO CABINET


PRODUCT OVERVIEW

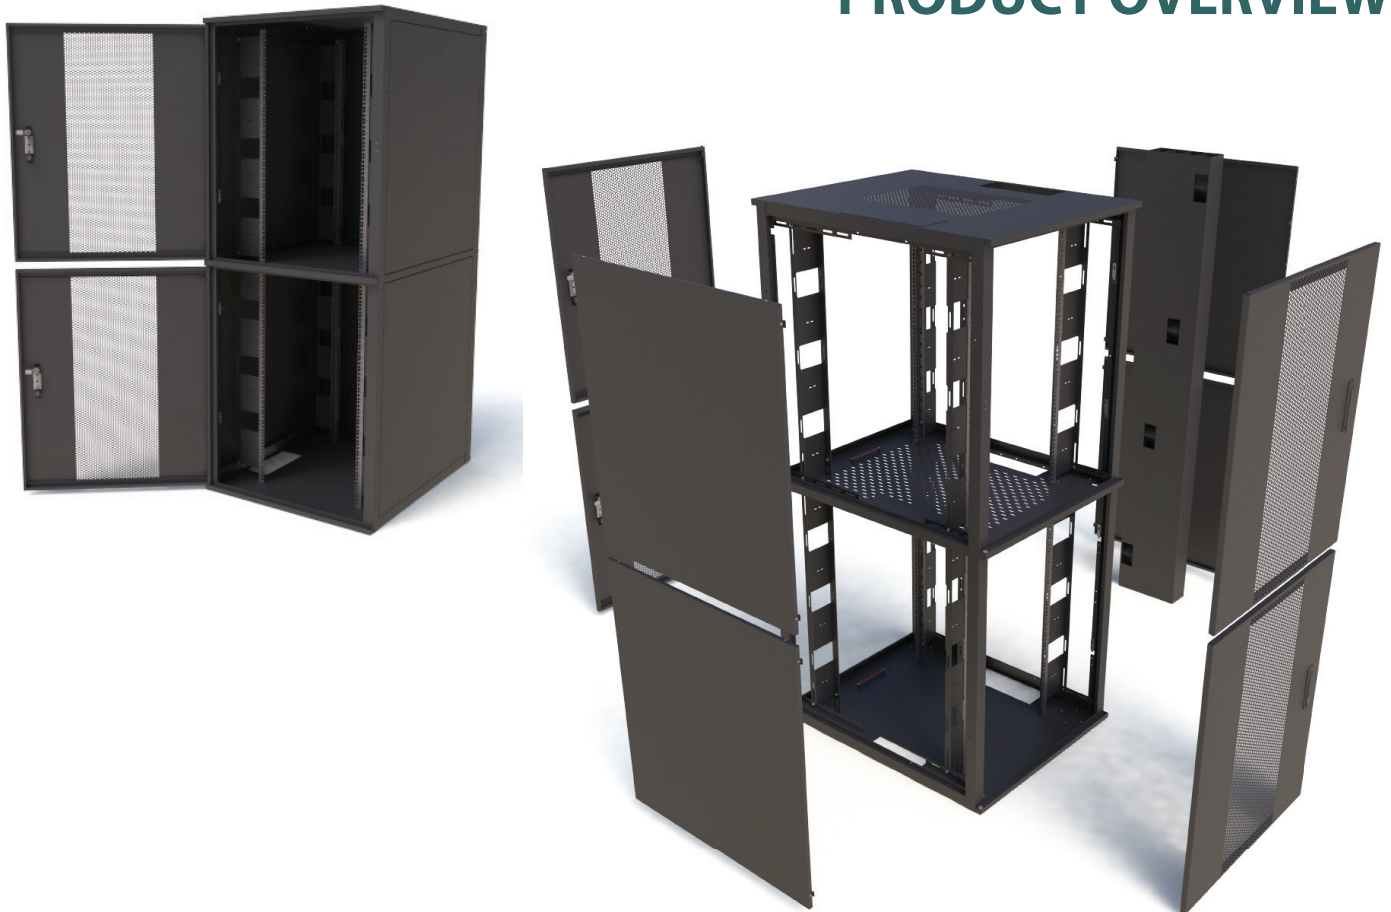

Features & Benefits

- 42U, 47U or 50U Height.
- 2 Pairs of fully adjustable 19" mounting profiles in each compartment.
- Front & rear mesh doors 80% open area.
- Each compartment to have its own key number or combination lock.
- Door panels are fully removable.
- Doors can be hinged left or right.
- Side panels removable, with internal latching.
- Cabinets are supplied fully assembled.
- All panels & doors fully earthed.
- 70mm x 100mm cable access hole per Co-Location
- Optional cable trunking can be mounted either side.
- Vented centre partition shelf between compartments.
- 10 Way x 80A earth bar fitted in every compartment.
- Cabinet powder coated black as standard, other colours available on request.
- Conforms to the following standards:
 - IEC 297-2
 - DIN 41494-7
 - DIN 41491-1
 - BS 5850/3192

Specifications

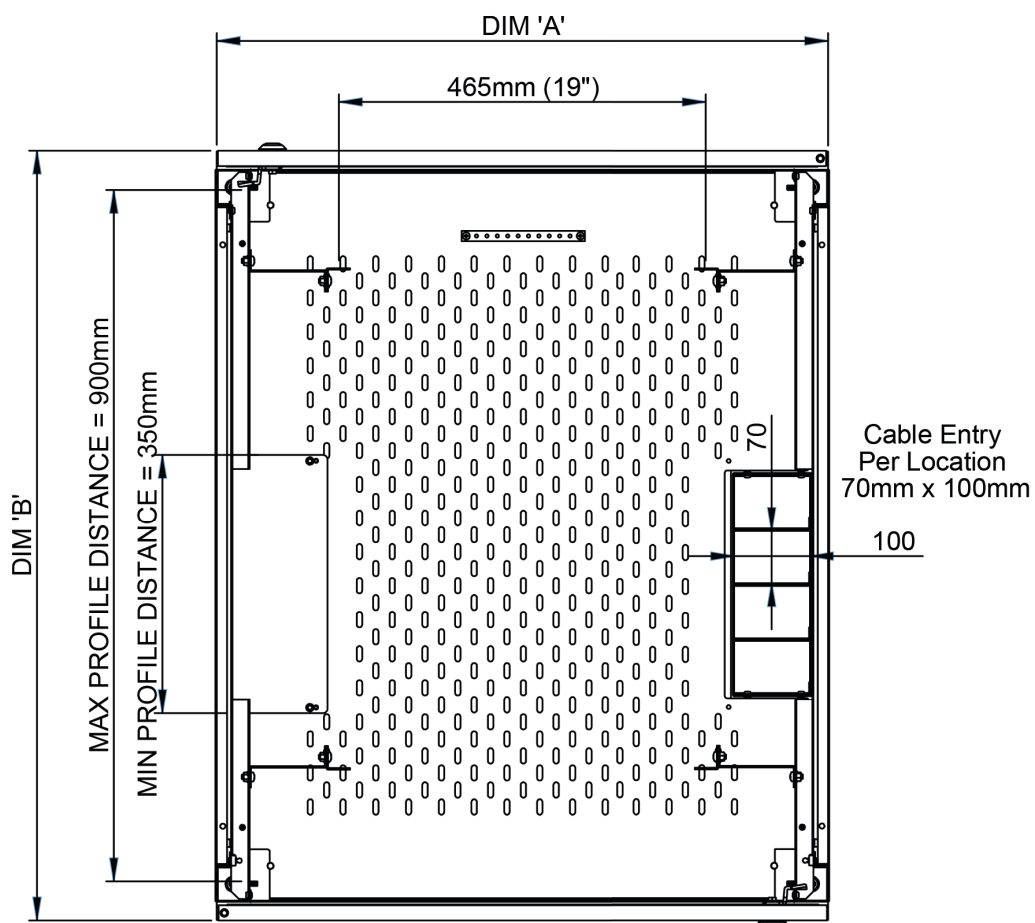

DIM 'A' (mm)	DIM 'B' (mm)	Compartment Size	Height (mm)
800	600	2 x 21U	1985 (42U)
800	600	2 x 22U	2207 (47U)
800	800	2 x 21U	1985 (42U)
800	800	2 x 22U	2207 (47U)
800	1000	2 x 21U	1985 (42U)
800	1000	2 x 22U	2207 (47U)
800	1200	2 x 21U	1985 (42U)
800	1200	2 x 22U	2207 (47U)
800	1000	2 x 24U	2340 (50U)
800	1200	2 x 24U	2340 (50U)



Ver: EDPCL2D8000723.1