

CHIMNEY SERVER RACK

VENTED SERVER CABINET





PRODUCT OVERVIEW

Illustration shows 46U 600mm x 1000mm

Features & Benefits

- Cabinets are supplied fully assembled
- Heights available in 42U, 46U, 47U & 50U
- Widths available in 600mm & 800mm
- Depths available in 800mm, 1000mm & 1200mm
- 2 Pairs of fully adjustable 19" mounting profiles
- Front mesh door 80% open area c/w swing handle & 3 point locking
- Solid rear door sealed to IP54 c/w swing handle
 & 3 point locking
- Doors are fully removable and can be hinged left or right
- Removable side panel sealed to IP54 c/w cam lock & key
- Optional 4 x brushed cable entry on right hand side panel
- All panels & doors fully earthed

- Large cable aperture in base
- Infill panels c/w cable aperture holes (800mm wide cabinet only)
- 2 x PDU cable tray fitted in rear corner post (1 per side)
- Brushed cable entry in roof
- Air scoop fitted in base at the rear
- Adjustable height exhaust duct fitted to lid c/w bubble seal gasket (height can be set to customer specification)
- Cabinet powder coated white or black, other colours available on request
- Conforms to the following standards:
 - IEC 60297-3
 - EIA 310-D
 - BS 3192

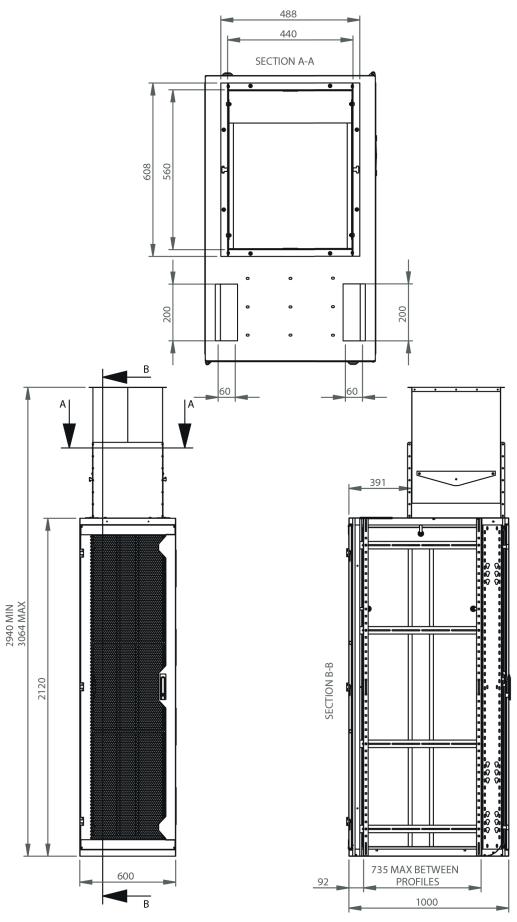


Illustration shows 46U 600mm x 1000mm

Ver: EDPCSR0723.1